



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5303025

2.0 - 4.0 GHz
15 WATTS
LINEAR POWER RF AMPLIFIER


**Solid State
 Broadband High
 Power RF Amplifier**

The 5303025 is a 15 Watt broadband amplifier that covers the 2.0 – 4.0 GHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR_{RF} amplifiers, the 5303025 comes with an extended multiyear warranty.

	<u>Parameter</u>	<u>Specification @ 25° C</u>
<u>Electrical</u>		
1	Frequency Range	2.0 – 4.0 GHz
2	Saturated Output Power	15 Watts typical
3	Power Output @ 1dB Comp.	10 Watts min
4	Small Signal Gain	+12 dB min
5	Gain Flatness	± 1.5 dB max
6	IP ₃	+50 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc typical @ 10 Watts
9	Spurious Signals	> -60 dBc typical @ 10 Watts
10	Input/Output Impedance	50 Ohms nominal
11	DC Input Current	6 Amps max
12	DC Input	13 VDC nominal
13	RF Input	+30 dBm nominal
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	A/AB
<u>Mechanical</u>		
16	Dimensions	7.9" x 5.4" x 1.2"
17	Weight	4 lb. max
18	Connectors	SMA female
19	Grounding	Chassis
20	Cooling	Adequate Heatsink Required
<u>Environmental</u>		
21	Baseplate Temperature	0° C to +50C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

Specifications subject to change without notice.

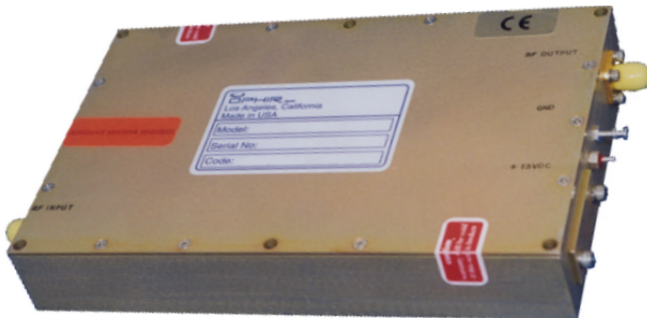

Approved By: _____ Date: _____